

AVOKKE LED Floodlight

Product Description


The AVOKKE LED High Power Floodlight is one of the most efficient floodlights boasting up to 139lm/W. In addition to this, a Meanwell driver combined with high quality robust construction makes this floodlight a perfect solution for even highly exposed areas. A heavy duty bracket also allows very versatile mounting making it ideal for post top applications. The AVOKKE is a high performance, versatile luminaire.

- High performance and efficiency
- Corrosion resistant die-cast aluminium body
- Marine Grade Coating (double layer polyester powder paint resistant to corrosion and salt spray).
- IP66 rated
- IK08 rated
- Meanwell driver
- Versatile design for both wall and post-top mounting
- 3 year warranty



**Designed and manufactured
in Europe**

Technical Drawing

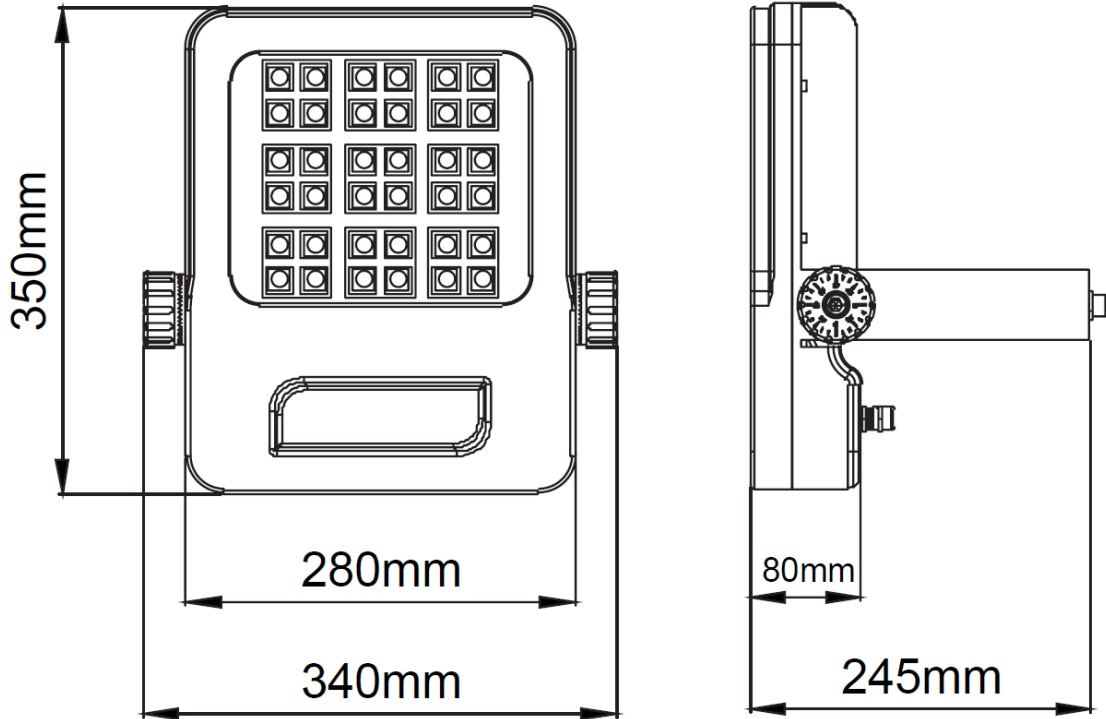

About OBEN Technik | “*the* lighting solution”

OBEN Technik is committed to addressing the need in the industry of trusted, reliable products, especially in the LED industry, with rapid delivery and quality components. We believe this leads to a trusted, high performance solution.

***the* quality solution...** OBEN Technik is dedicated to providing the industry with solutions that are simply guaranteed. We are proud of our commitment to European manufacture and design utilizing latest technology and high quality components. As a result, we have solutions that will significantly outperform other products on the market.

***the* bespoke solution...** OBEN Technik takes a different approach to projects we work on. If we believe a product can be developed specifically to improve the project, we will.

***the* delivery solution...** OBEN Technik uses its network of distributors to ensure rapid delivery. Instead of products being manufactured in Asia, OBEN Technik can manufacture and deliver with short lead times. In addition, we can even palletize deliveries specifically for easy distribution on site.

Solutions... you can trust.

www.obentechnik.com



AVOKKE | LED FLOODLIGHT

Wattage	50W	75W	100W	125W	150W	175W	200W
Voltage	220-240V – 50-60Hz						
Light Colour	6000K	6000K	6000K	6000K	6000K	6000K	6000K
Lumens per Watt	143 lm/W	137 lm/W	130.7 lm/W	139 lm/W	136 lm/W	133 lm/W	130 lm/W
Protection	IK08						
Dimensions	See Image						
Fixing	Fixing Bracket supplied						
IP Rating	IP65						
Construction	Corrosion Resistant die-cast Aluminium body						
Recommended Location	Indoors/Outdoors						
Warranty	3 Years						
Product Code	AVL5060	AVL7560	AVL10060	AVL12560	AVL15060	AVL17560	AVL20060