

AVOKKE LED Floodlight

Product Description

The AVOKKELED LED High Power Floodlight is one of the most efficient floodlights boasting up to 139lm/W. In addition to this, a Meanwell driver combined with high quality robust construction makes this floodlight a perfect solution for even highly exposed areas. A heavy duty bracket also allows very versatile mounting making it ideal for post top applications. The AVOKKE is a high performance, versatile luminaire.


- High performance and efficiency
- Die-cast aluminium body
- IP66 rated
- IK08 rated
- Meanwell driver
- Versatile design for both wall and post-top mounting
- 3 year warranty



Designed and manufactured
in Europe



Technical Drawing

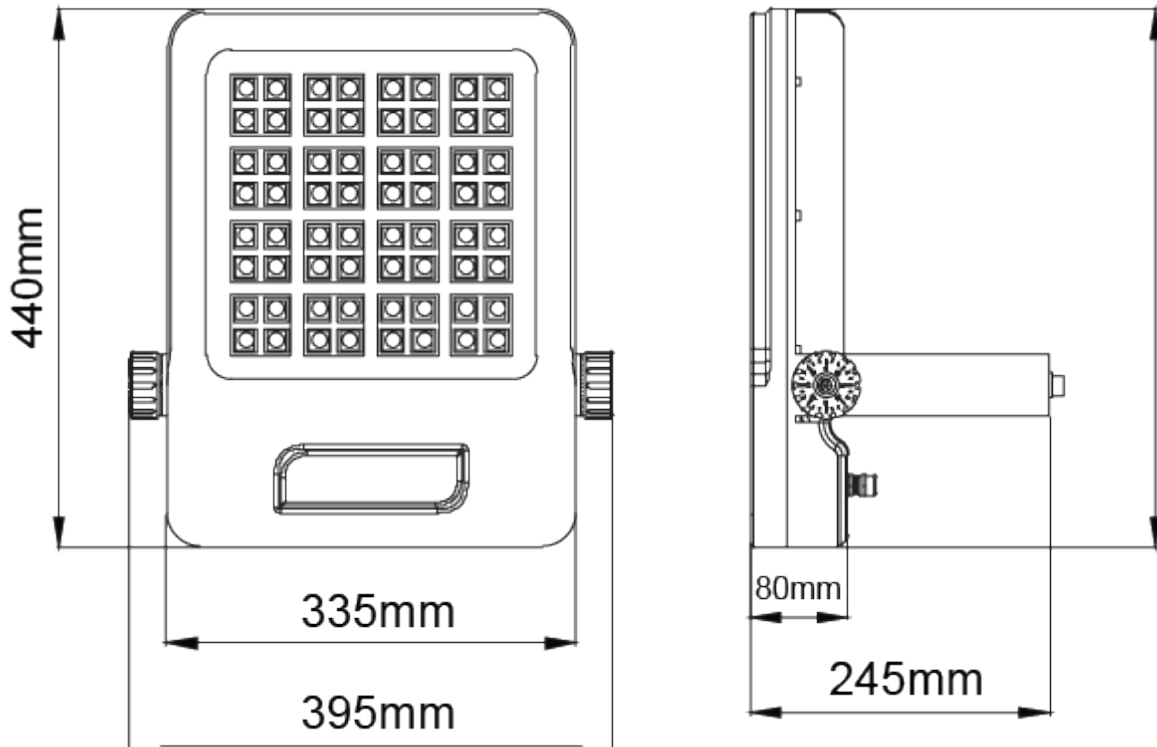

About OBEN Technik | “the lighting solution”

OBEN Technik is committed to addressing the need in the industry of trusted, reliable products, especially in the LED industry, with rapid delivery and quality components. We believe this leads to a trusted, high performance solution.

the quality solution... OBEN Technik is dedicated to providing the industry with solutions that are simply guaranteed. We are proud of our commitment to European manufacture and design utilizing latest technology and high quality components. As a result, we have solutions that will significantly outperform other products on the market.

the bespoke solution... OBEN Technik takes a different approach to projects we work on. If we believe a product can be developed specifically to improve the project, we will.

the delivery solution... OBEN Technik uses its network of distributors to ensure rapid delivery. Instead of products being manufactured in Asia, OBEN Technik can manufacture and deliver with short lead times. In addition, we can even palletize deliveries specifically for easy distribution on site.

Solutions... you can trust.

www.obentechnik.com



AVOKKE | LED FLOODLIGHT

Wattage	105W				148W				190W			
Voltage	220-240V – 50-60Hz											
Light Colour	2700K	3000K	4000K	6000K	2700K	3000K	4000K	6000K	2700K	3000K	4000K	6000K
Lumen Output	12940lm	13480lm	14042lm	14600	17425lm	18150lm	18905lm	19660lm	21000lm	21890lm	22800lm	23712lm
Lumens per Watt	123 lm/W	128 lm/W	133 lm/W	139 lm/W	117 lm/W	122 lm/W	127 lm/W	133 lm/W	111 lm/W	115 lm/W	120 lm/W	125 lm/W
Beam Angle	20°, 36°, 69°											
Protection	IK08											
Dimensions	See Image											
Fixing	Fixing Bracket supplied											
IP Rating	IP65											
Construction	Corrosion Resistant die-cast Aluminium body											
Recommended Location	Indoors/Outdoors											
Warranty	3 Years											
Product Code	AVL10527	AVL10530	AVL10540	AVL10560	AVL14827	AVL14830	AVL14840	AVL14860	AVL19027	AVL19030	AVL19040	AVL19060